


DISPLACEMENT CODE	G MAX
022	132.7 [5.22]
025	133.5 [5.26]
028	132.7 [5.22]
035	136.5 [5.37]
045	136.5 [5.37]
059	139.5 [5.49]
073	142.8 [5.62]
089	146.4 [5.76]
097	148.2 [5.84]
113	151.7 [5.97]
141	158.1 [6.22]
179	166.7 [6.56]
226	177.1 [6.97]
451	228.0 [8.98]

SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RLL	11-10-07	14736
B	-1<3C>3.25/82.6 MAX WAS 3.21/81.6 MAX-2<2C>REMOVED 3.31/84.1 Ø MAX -3<2B>ADDED 3.36/85.4 MAX	DPR	12-10-09	18329
C	-1<3C> 3.21/81.6 WAS 3.25/82.6 -2< >2B> 3.31/84.1 WAS 3.36/85.4	LK	11-11-09	19520
D	-1<REVISED G MAX TAB -2>.20/5.1 MAX WAS .21/5.4 MAX -3<REVISED PICTORIALLY	AGJ	8-27-02	22674
E	<4B>.535±.015/-0.005/13.59±0.38/-0.13 Ø WAS .535±.005/13.59±0.13 Ø	AGJ	1-28-02	39853
F	-1<4C>WAS 5.17/131.4 MAX -2<4B>WAS 3.81/96.8 MAX	SJP	04-07-04	46856
G	-1<REVISED PICTORIALLY -2<4D>UPDATED TABULATION FOR G MAX -3<2B>REMOVED DIM 5.1<20> MAX -4<UPDATED NOTE AS PER ESP-022-69	AAB	02-17-14	0055528
H	<1C>ADDED EATON LOGO TO END CAP	AAB	01-22-15	0061684
J	<3A> NOTE 3 WAS CASE DRAIN : 2...	JVD	07-27-15	0065202

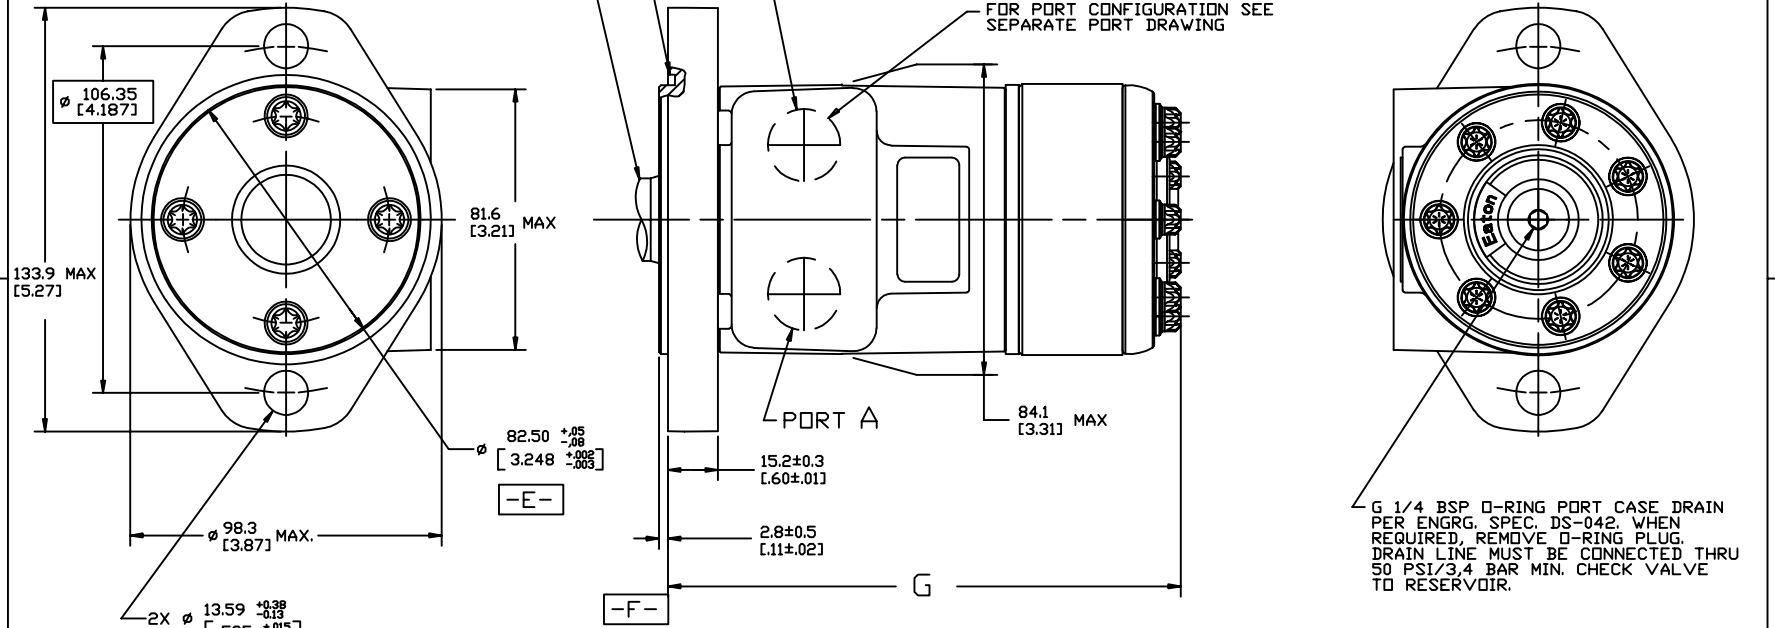

- NOTE:
1. ROTATION: STANDARD; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE CLOCKWISE WHEN PORT "A" IS PRESSURIZED. COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED. REVERSE ; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE CLOCKWISE WHEN PORT "B" IS PRESSURIZED. COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED.
  2. MOUNTING FLANGE: AA = 2 BOLT STD; 82.50 [3.248] DIA. X 3.05 [1.20] PILOT, 13.59 [5.35] DIA. MOUNTING HOLES DN 106.35 [4.187] DIA. B.C.
  3. CASE DRAIN: 02 = G 1/4 BSP STRAIGHT THD PORT (END CAP)

REVIEWED FOR CLASSIFICATION PER ESP-042

DRAWING BASED ON ASME Y14.5M 1982

EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION

THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREIN, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, AND IS HEREBY ENJOINED AND SUBJECT TO RECALL BY EATON AT ANY TIME BY WRITING POSSESSION OF THIS DOCUMENT, THE RECEIVING ADDRESSEES AND AGREE THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTERESTS OF EATON, AND THAT NO PORTION OF THIS DOCUMENT MAY BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICTING CONTRACTUAL PROVISIONS, THIS NOTICE SHALL GOVERN. THE STATUS OF THIS DOCUMENT IS: CONFIDENTIAL EATON CORPORATION - ALL RIGHTS RESERVED.

Powering Business Worldwide  
Eaton Hydrostatics LLC  
14615 Lowe Disk Road  
Eaton Park, WI 53534  
USA

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	<input type="checkbox"/>	DRAWN RLL 10-01-07		MATERIAL/HEAT TREAT	-
MILLIMETERS (INCHES)	<input checked="" type="checkbox"/>	CHECKED NO	BY/DATE 1-25-08	TITLE	H MOTOR INSTALLATION
TOLERANCES		UNSPECIFIED RADI ARE	ENGRG WCV	REWORKS	<input type="checkbox"/>
.X ± ---		---	BY/DATE 1-25-08	METALLURGY	---
.XX ± ---		UNSPECIFIED DRAFT ANGLES ARE:	---	NUMBER	A-37-314
.XXX ± ---		---	---	SCALE	1/1 SHEET 1 OF 1
< ± ±		---	---	THIRD ANGLE PROJECTION	<input checked="" type="checkbox"/>
---		---	---	METRIC SCALE	<input type="checkbox"/>
---		---	---	DO NOT SCALE	<input type="checkbox"/>