


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RJ	6-18-92	22408

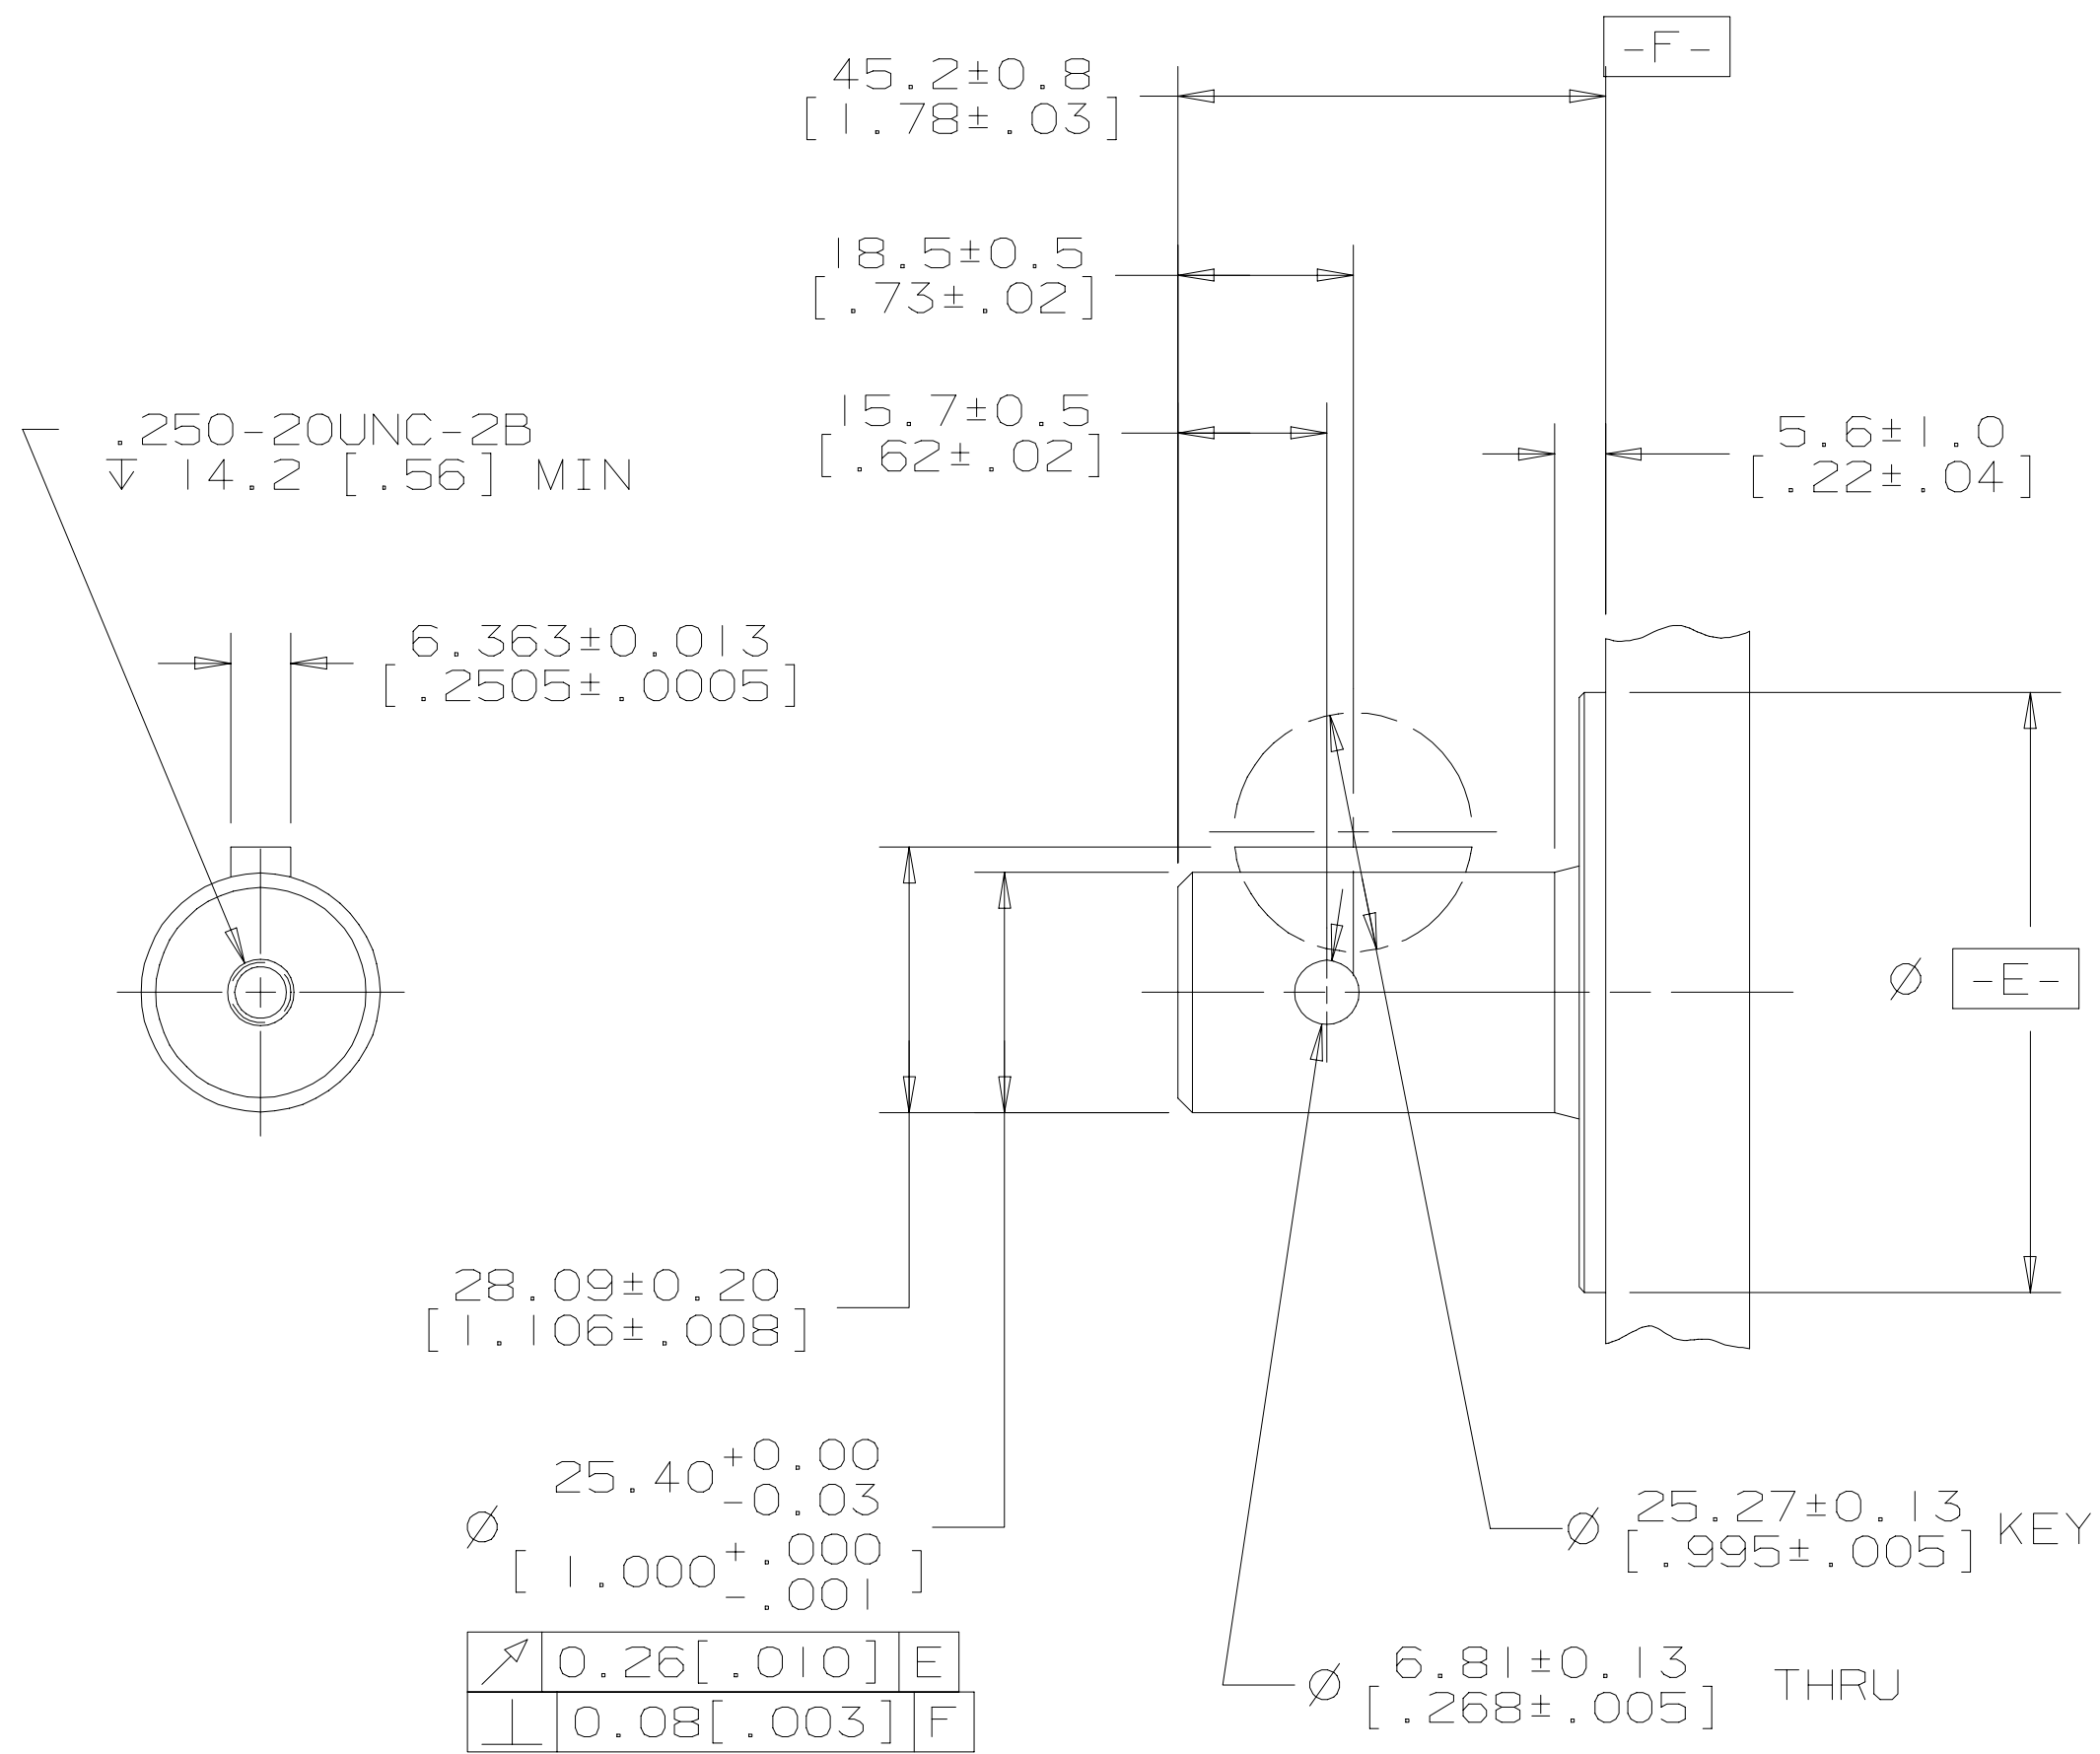

MODEL NO.  
MOXXXX40XXXXXXX

SMG

OUTPUT SHAFT  
40 = 25.4[1.00] DIA. STRAIGHT WITH WOODRUFF KEY, 6.6[.26] DIA. CROSSHOLE 15.7[.62] FROM END AND .250-20 THREADED HOLE

	0.26[.010]	E
	0.08[.003]	F

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS [INCHES] <input checked="" type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982	
	NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION Eaton Corporation claims proprietary rights in the information disclosed hereon. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown hereon without the written permission of the Eaton Corporation.	
TOLERANCES .X ± - .XX ± - .XXX ± - ANGLES ± -	DRAWN BY/DATE RJ 6-19-92 CHECKED BY/DATE ENGRG BY/DATE METALLURGY BY/DATE	MATERIAL/HEAT TREAT TITLE SHAFT INSTALLATION
UNSPECIFIED RADII ARE - UNSPECIFIED DRAFT ANGLES ARE -	 THIRD ANGLE PROJECTION	MICROINCHES <input type="checkbox"/> MICROMETERS [MICROINCHES] <input type="checkbox"/> NUMBER A-109-040
DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	DO NOT SCALE	ARITHMETICAL AVERAGE <input checked="" type="checkbox"/> SCALE 1/1 SHEET 1 OF 1

