


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RJ	6-18-92	22408

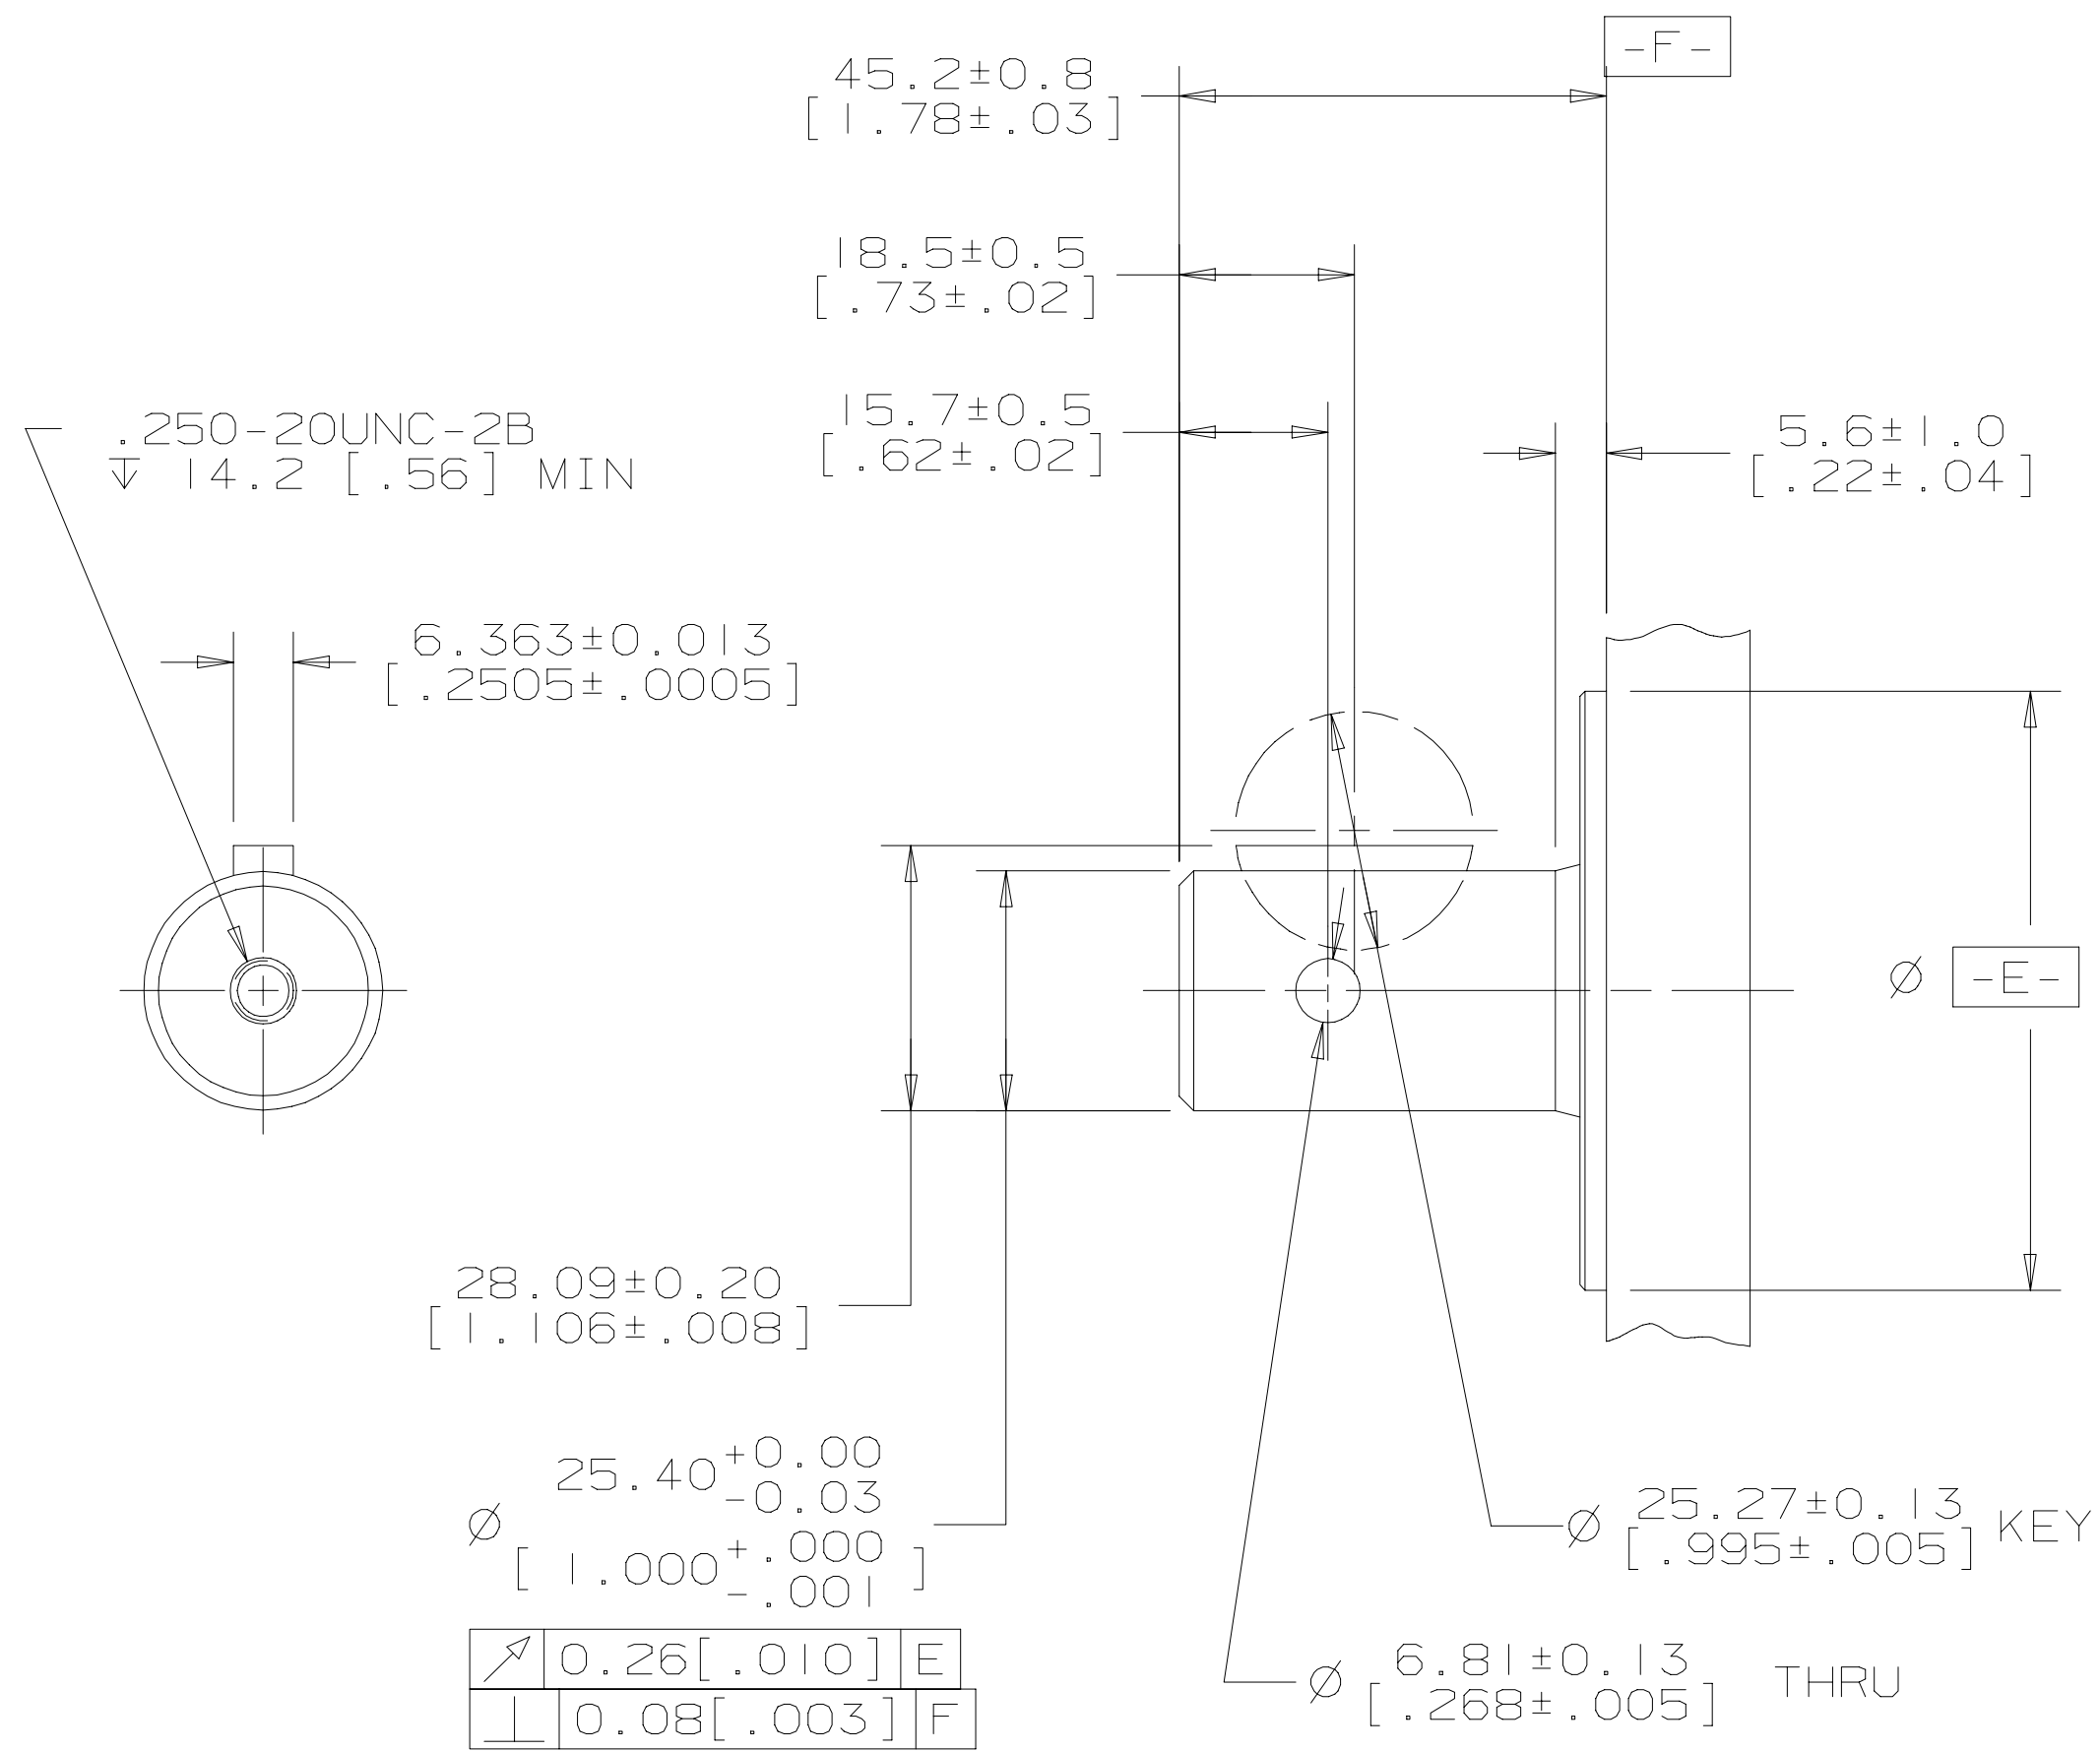

MODEL NO.
MOXXXX40XXXXXXXXX

SMG

OUTPUT SHAFT
40 = 25.4[1.00] DIA. STRAIGHT WITH WOODRUFF KEY, 6.6[.26] DIA. CROSSHOLE 15.7[.62] FROM END AND .250-20 THREADED HOLE

	0.26[.010]	E
	0.08[.003]	F

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS [INCHES] <input checked="" type="checkbox"/> TOLERANCES .X ± - .XX ± - .XXX ± - ANGLES ± - UNSPECIFIED RADII ARE - UNSPECIFIED DRAFT ANGLES ARE - DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982		
	NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION Eaton Corporation claims proprietary rights in the information disclosed hereon. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown hereon without the written permission of the Eaton Corporation.		
	DRAWN BY/DATE RJ 6-19-92 CHECKED BY/DATE ENGRG BY/DATE METALLURGY BY/DATE	MATERIAL/HEAT TREAT TITLE SHAFT INSTALLATION	
	MICROINCHES <input type="checkbox"/> MICROMETERS [MICROINCHES] <input type="checkbox"/> THIRD ANGLE PROJECTION DO NOT SCALE ARITHMETICAL AVERAGE <input checked="" type="checkbox"/>	NUMBER A-109-040 SCALE 1/1 SHEET 1 OF 1	

