REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	MLL		2-12-02	M27248
B	-1)(6A)MOUTING TYPE WAS "C" -2)(6A)NOTE "3" REVISED	SSD		1-24-07	0002527

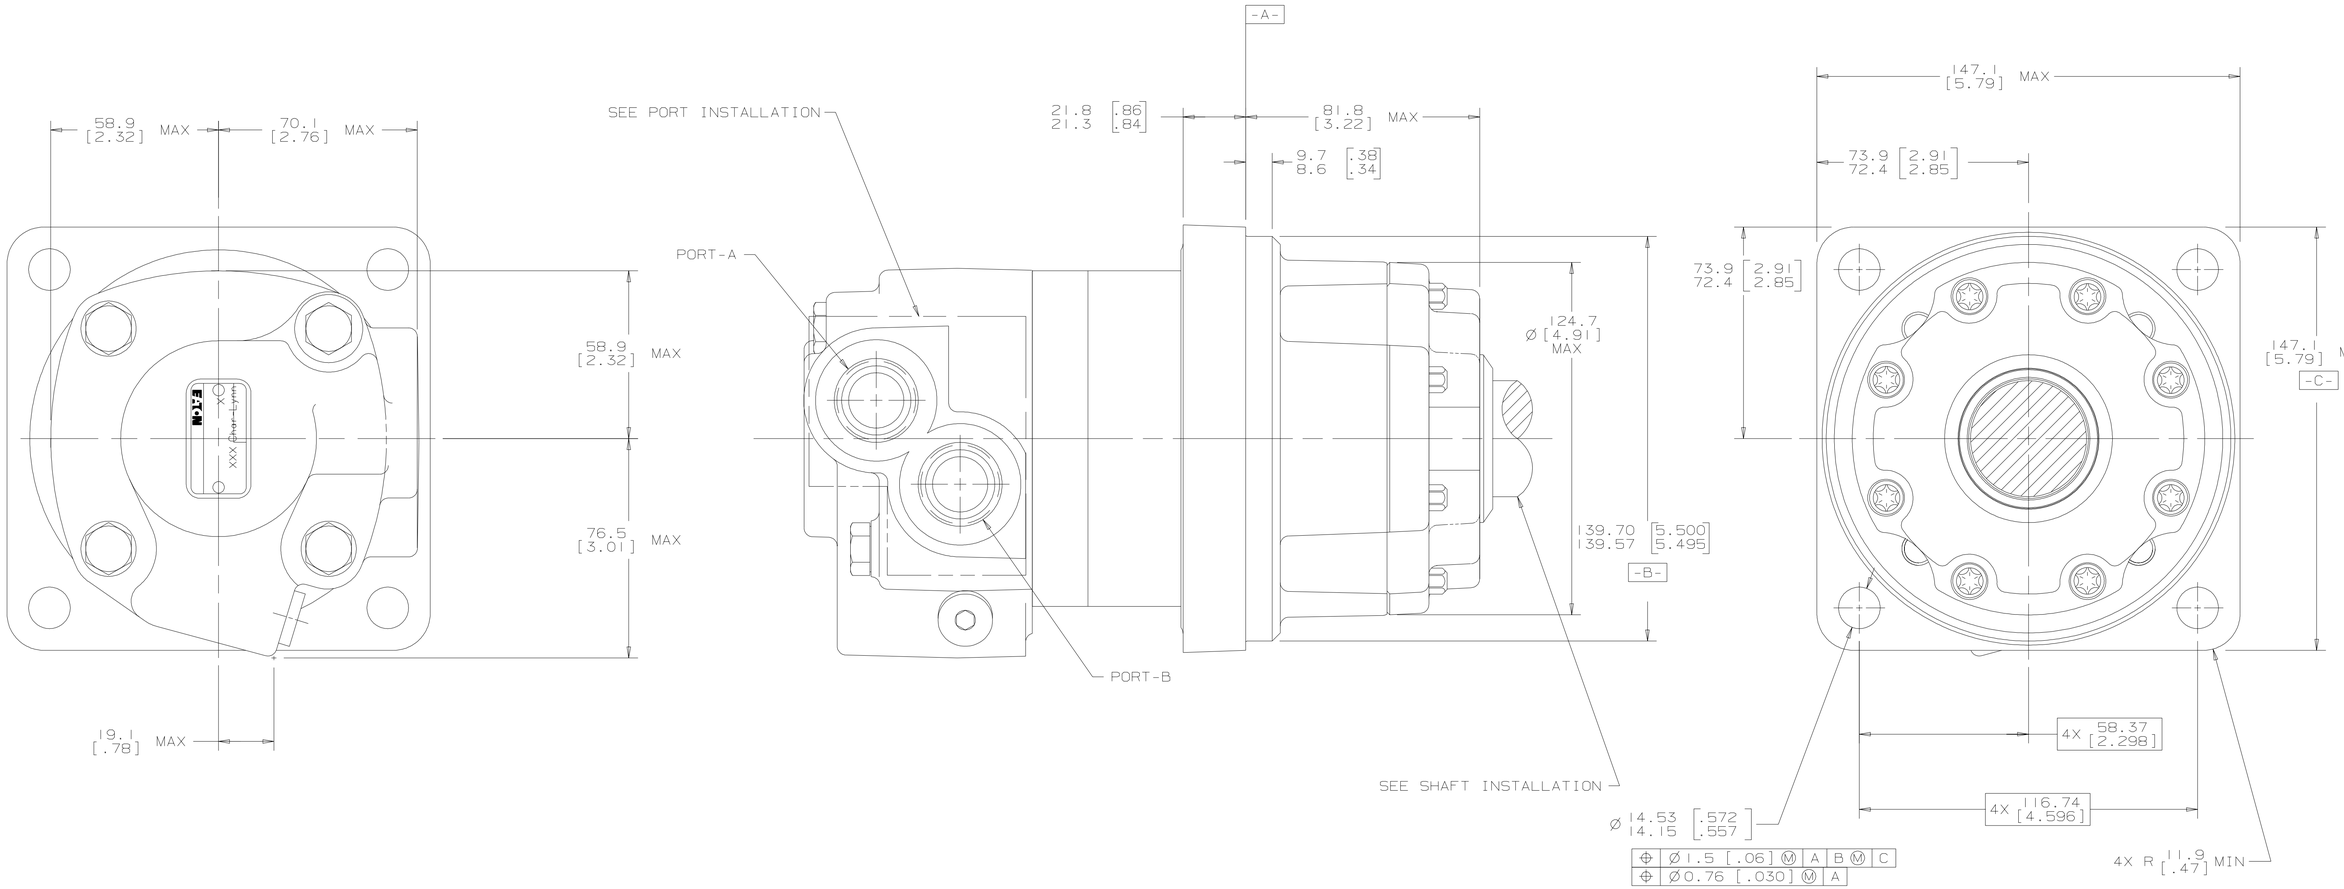

NOTE

1 ROTATION:
STANDARD; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "A" IS PRESSURIZED
COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE; WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
CLOCKWISE WHEN PORT "B" IS PRESSURIZED.
COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AC
WHEEL, 4 BOLT: 139.70 [5.500] PILOT DIA.
14.27 [.562] DIA. HOLES ON 165.10 [6.500]
DIA. BOLT CIRCLE

3 SEAL OPTION:4
SLINGER PROTECTOR (SEAL)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN
INCHES ☐
MILLIMETERS [INCHES] ☒

TOLERANCES
.X ± ----
.XX ± ----
.XXX ± ----
∠ ± ----

UNSPECIFIED RADII ARE

UNSPECIFIED DRAFT ANGLES ARE

DRAWING FORMAT
CADD ☒ MANUAL ☐

DRAWING BASED ON ANSI Y14.5M-1982

NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION
Eaton Corporation claims proprietary rights in the information disclosed hereon. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown hereon without the written permission of the Eaton Corporation.

Eaton Hydraulics, Inc.
14615 Lone Oak Road
Eden Prairie, Mn. 55344

DRAWN BY/DATE MLL 2-13-02
CHECKED BY/DATE SMM 2-15-02
ENGRG BY/DATE TIM 2-19-02
METALLURGY BY/DATE ----
MATERIAL/HEAT TREAT

TITLE
4000 SERIES MOTOR INSTALLATION

THIRD ANGLE PROJECTION
DO NOT SCALE

MICROINCHES ☐
MICROMETERS [MICROINCHES] ☐
ARITHMETICAL AVERAGE ✓

NUMBER
A-599-001

SCALE 1/1
SHEET 1 OF 1