PART NUMBER	WEATHERHEAD CATALOG NUMBER	TH'D "P"	TH'D "T"	A REF	B REF	C REF	D REF	E REF	F REF	
2000–2–4B	48X4	1/8–27	7/16–20	26.9 [1.06]	12.7 [.50]	10.2 [.40]	4.8 [.19]	5.6 [.22]	7/16	AL 2
2000–2–5B	48X5	1/8–27	1/2–20	29.5 [1.16]	14.2 [.56]	10.2 [.40]	5.6 [.22]	5.6 [.22]	1/2	
2000–2–6B	48X6X2	1/8–27	5/8–18	31.8 [1.25]	15.7 [.62]	10.2 [.40]	7.1 [.28]	5.6 [.22]	5/8	
2000–4–4B	48X4X4	1/4–18	7/16–20	31.8 [1.25]	12.7 [.50]	14.7 [.58]	4.8 [.19]	7.9 [.31]	9/16	
2000–4–5B	48X5X4	1/4–18	1/2–20	34 [1.34]	14.2 [.56]	14.7 [.58]	5.6 [.22]	7.9 [.31]	9/16	
2000–4–6B	48X6	1/4–18	5/8–18	36.6 [1.44]	15.7 [.62]	14.7 [.58]	7.1 [.28]	7.1 [.28]	5/8	
2000–4–8B	48X8X4	1/4–18	3/4–16	41.1 [1.62]	19.1 [.75]	14.7 [.58]	10.4 [.41]	7.9 [.31]	3/4	
2000–4–10B	–	1/4–18	7/8–14	46 [1.81]	22.4 [.88]	14.7 [.58]	12.7 [.50]	7.9 [.31]	7/8	
2000–6–4B	48X4X6	3/8–18	7/16–20	33.3 [1.31]	12.7 [.50]	14.7 [.58]	4.8 [.19]	10.4 [.41]	11/16	AM 1
2000–6–5B	48X5X6	3/8–18	1/2–20	35.1 [1.38]	14.2 [.56]	14.7 [.58]	5.6 [.22]	10.4 [.41]	11/16	AM 1
2000–6–6B	48X6X6	3/8–18	5/8–18	36.6 [1.44]	15.7 [.62]	14.7 [.58]	7.1 [.28]	10.4 [.41]	11/16	
2000–6–8B	48X8	3/8–18	3/4–16	41.1 [1.62]	19.1 [.75]	14.7 [.58]	10.4 [.41]	10.4 [.41]	3/4	
2000–6–10B	48X10X6	3/8–18	7/8–14	46 [1.81]	22.4 [.88]	14.7 [.58]	12.7 [.50]	10.4 [.41]	7/8	
2000–8–4B	48X4X8	1/2–14	7/16–20	39.6 [1.56]	12.7 [.50]	19.3 [.76]	4.8 [.19]	14.2 [.56]	7/8	AM 1
2000–8–6B	48X6X8	1/2–14	5/8–18	42.9 [1.69]	15.7 [.62]	19.3 [.76]	7.1 [.28]	14.2 [.56]	7/8	
2000–8–8B	48X8X8	1/2–14	3/4–16	46 [1.81]	19.1 [.75]	19.3 [.76]	10.4 [.41]	14.2 [.56]	7/8	
2000–8–10B	48X10	1/2–14	7/8–14	50.8 [2.00]	22.4 [.88]	19.3 [.76]	12.7 [.50]	12.7 [.50]	7/8	
2000–8–12B	48X12	1/2–14	1 1/16–14	55.6 [2.19]	25.4 [1.00]	19.3 [.76]	14.2 [.56]	14.2 [.56]	1 1/16	
2000–12–8B	48X8X12	3/4–14	3/4–16	49.3 [1.94]	19.1 [.75]	19.3 [.76]	10.4 [.41]	19.1 [.75]	1 1/16	AM 1
2000–12–10B	48X10X12	3/4–14	7/8–14	52.3 [2.06]	22.4 [.88]	19.3 [.76]	12.7 [.50]	19.1 [.75]	1 1/16	AM 1
2000–12–12B	48X12X12	3/4–14	1 1/16–14	55.6 [2.19]	25.4 [1.00]	19.3 [.76]	16.0 [.63]	19.1 [.75]	1 1/16	
2000–2–2B	48X2	1/8–27	5/16–24	22.9 [.90]	9.7 [.38]	10.2 [.40]	2 [.08]	5.6 [.22]	7/16	AL 1
2000–2–3B	48X3	1/8–27	3/8–24	25.4 [1.00]	11.2 [.44]	10.2 [.40]	3.3 [.13]	5.6 [.22]	7/16	AL 1
2000–4–7B	48X7	1/4–18	11/16–16	38.9 [1.53]	17.5 [.69]	14.7 [.58]	7.9 [.31]	7.9 [.31]	11/16	AL 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
AL	REDRAWN. (1) ADDED PART # 2000–2–2B, 2000–2–3B, 2000–4–7B. (2) ADDED WEATHERHEAD CATALOG NUMBER.	2011–07–12 PSW/VJS	0057638–ECO
AM	(1) ADDED WEATHERHEAD CATALOG NUMBER.	2012–04–04 ONJ/PSW	0068739–ECO

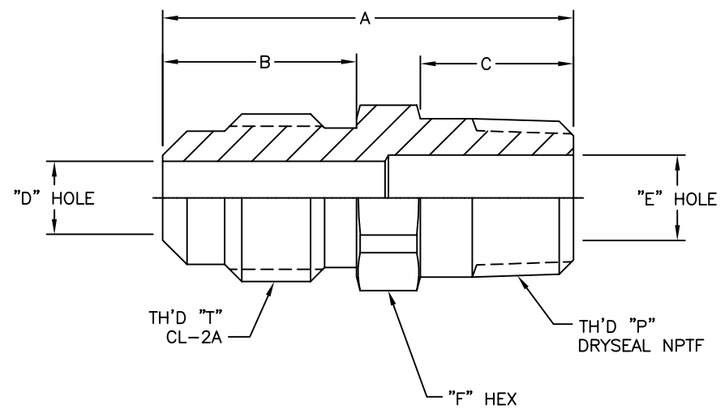

METRIC

2. MATERIAL: BRASS
1. DIMENSIONS ARE IN MILLIMETERS [INCHES].

DWG.NO. 2000–B | SH. 1 | REV. AM

DRAWN P. WARUDKAR
CHECKED V. SURYAWANSHI
APPROVED Y. KULKARNI
RELEASE DATE 2011–07–12
0057638–ECO
THIRD ANGLE PROJECTION

EATON
INDUSTRIAL SECTOR
HYDRAULICS GROUP,
FLUID CONVEYANCE PRODUCTS,
MAUMEE, OHIO U.S.A.

DRAWING TITLE
ADAPTER
SAE 45° FLARE – CONNECTOR
(SAE #010102)

SIZE A2 | DRAWING NUMBER 2000–B | REV AM
SCALE NONE | DIST U | CAGE CODE 01276 | SHEET 1

CONFIDENTIAL AND PROPRIETARY NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION
THIS DOCUMENT, INCLUDING THE DRAWING AND INFORMATION CONTAINED THEREON, IS CONFIDENTIAL AND IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION, MERELY ON LOAN AND SUBJECT TO RECALL BY EATON AT ANY TIME. BY TAKING POSSESSION OF THIS DOCUMENT, THE RECIPIENT ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE USED IN ANY MANNER ADVERSE TO THE INTEREST OF EATON, NOR IN CONTRAVENTION OF THE TERMS HEREOF, NOR BE COPIED OR OTHERWISE REPRODUCED WITHOUT THE PRIOR WRITTEN CONSENT OF EATON. IN THE CASE OF CONFLICT BETWEEN THE LANGUAGE OF THE TERMS HEREOF AND THE LANGUAGE OF THIS NOTICE, THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.
2008 Eaton Corporation – All Rights Reserved