


PART NUMBER	I.D. (REF) mm [in.]	O.D. (MAX) mm [in.]	OPERATING PRESSURE bar [psi]	MIN. BURST PRESSURE bar [psi]	MIN. BEND RADIUS mm [in.]	WEIGHT kg/m [lbs/ft]
2808-8	10.7 [.42]	15.4 [.61]	190 [2750]	758 [11000]	117.3 [4.62]	0.30 [.20]
2808-10	13.0 [.51]	17.9 [.70]	172 [2500]	690 [10000]	139.7 [5.50]	0.39 [.26]
2808-12	16.3 [.64]	21.3 [.84]	121 [1750]	483 [7000]	165.1 [6.50]	0.45 [.30]
2808-16	22.4 [.88]	28.4 [1.12]	103 [1500]	414 [6000]	187.5 [7.38]	0.65 [.44]
2808-20	28.4 [1.12]	34.3 [1.35]	78 [1125]	310 [4500]	279.4 [11.00]	0.85 [.57]
2808-24	35.1 [1.38]	41.2 [1.62]	55 [800]	221 [3200]	355.6 [14.00]	1.04 [.70]

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
P	REDRAWN & REDESIGNED. UPDATED TO DANFOSS FORMAT & DIMENSION STYLE.	2015-01-08 SDR/DHS	0106154-ECO

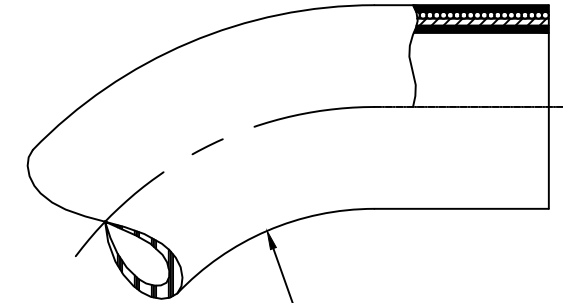

MIN. BEND RADIUS

METRIC

5. ALL HOSE ATTRIBUTES ARE METRIC [ENGLISH].
4. TEMPERATURE RANGE: -73°C TO +260°C [-100°F TO +500°F].
3. EXAMPLE OF IDENTIFICATION: (NO LAYLINE)
 - a) STAINLESS STEEL BRAID
 - b) WHITE TUBE STOCK
2. APPLICATION:
HOT AIR, STEAM AND MOST CHEMICAL APPLICATIONS
1. CONSTRUCTION:
PTFE TUBE, TWO STAINLESS STEEL WIRE BRAIDS REINFORCEMENT

DRAWN S. REVANKAR		Danfoss FLUID CONVEYANCE DIVISION	
CHECKED D. SHEWALE			
APPROVED G. CLARK		DRAWING TITLE	
RELEASE DATE 2015-01-08		HOSE	
0106154-ECO		MEDIUM PRESSURE, PTFE TUBE	
THIRD ANGLE PROJECTION	SIZE A3	DRAWING NUMBER 2808	REV P
	SCALE NONE	DIST U	CAGE CODE 01276 SHEET 1
THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHT RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)			