
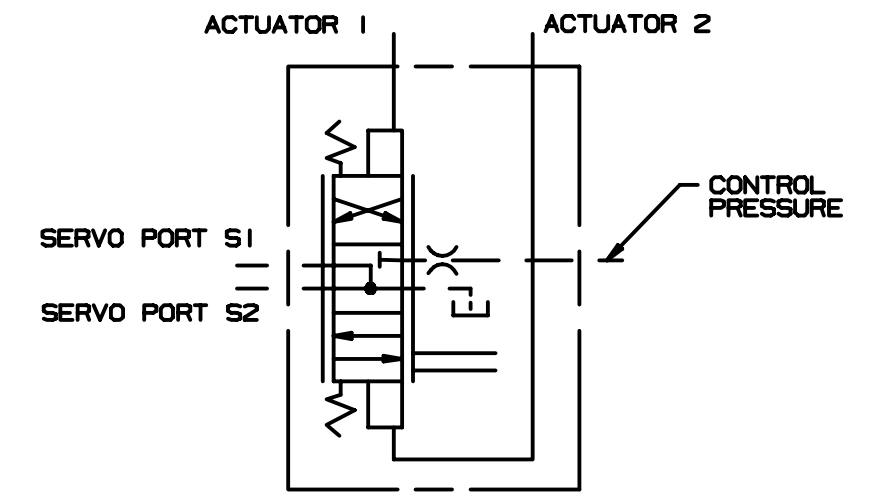


DISPLACEMENT	DIM A
54,34 cm ³ /r [3.316 in ³ /r]	37,3 [1.47]
63,66 cm ³ /r [3.885 in ³ /r]	37,3 [1.47]
75,28 cm ³ /r [4.594 in ³ /r]	37,3 [1.47]
89,13 cm ³ /r [5.439 in ³ /r]	48,5 [1.91]
105,4 cm ³ /r [6.431 in ³ /r]	48,5 [1.91]

REV	DESCRIPTION	BY	CHK	DATE	ECN
A	RELEASE FOR SAMPLES AND ESTIMATE	AGJ	JED	10-11-98	M12796
C	ENGINEERING RELEASE -I) REVISED PICTORIALY	EMR	JED	8-6-97	29849
D	REVISED PICTORIALY	EMR	JED	2-18-98	30736

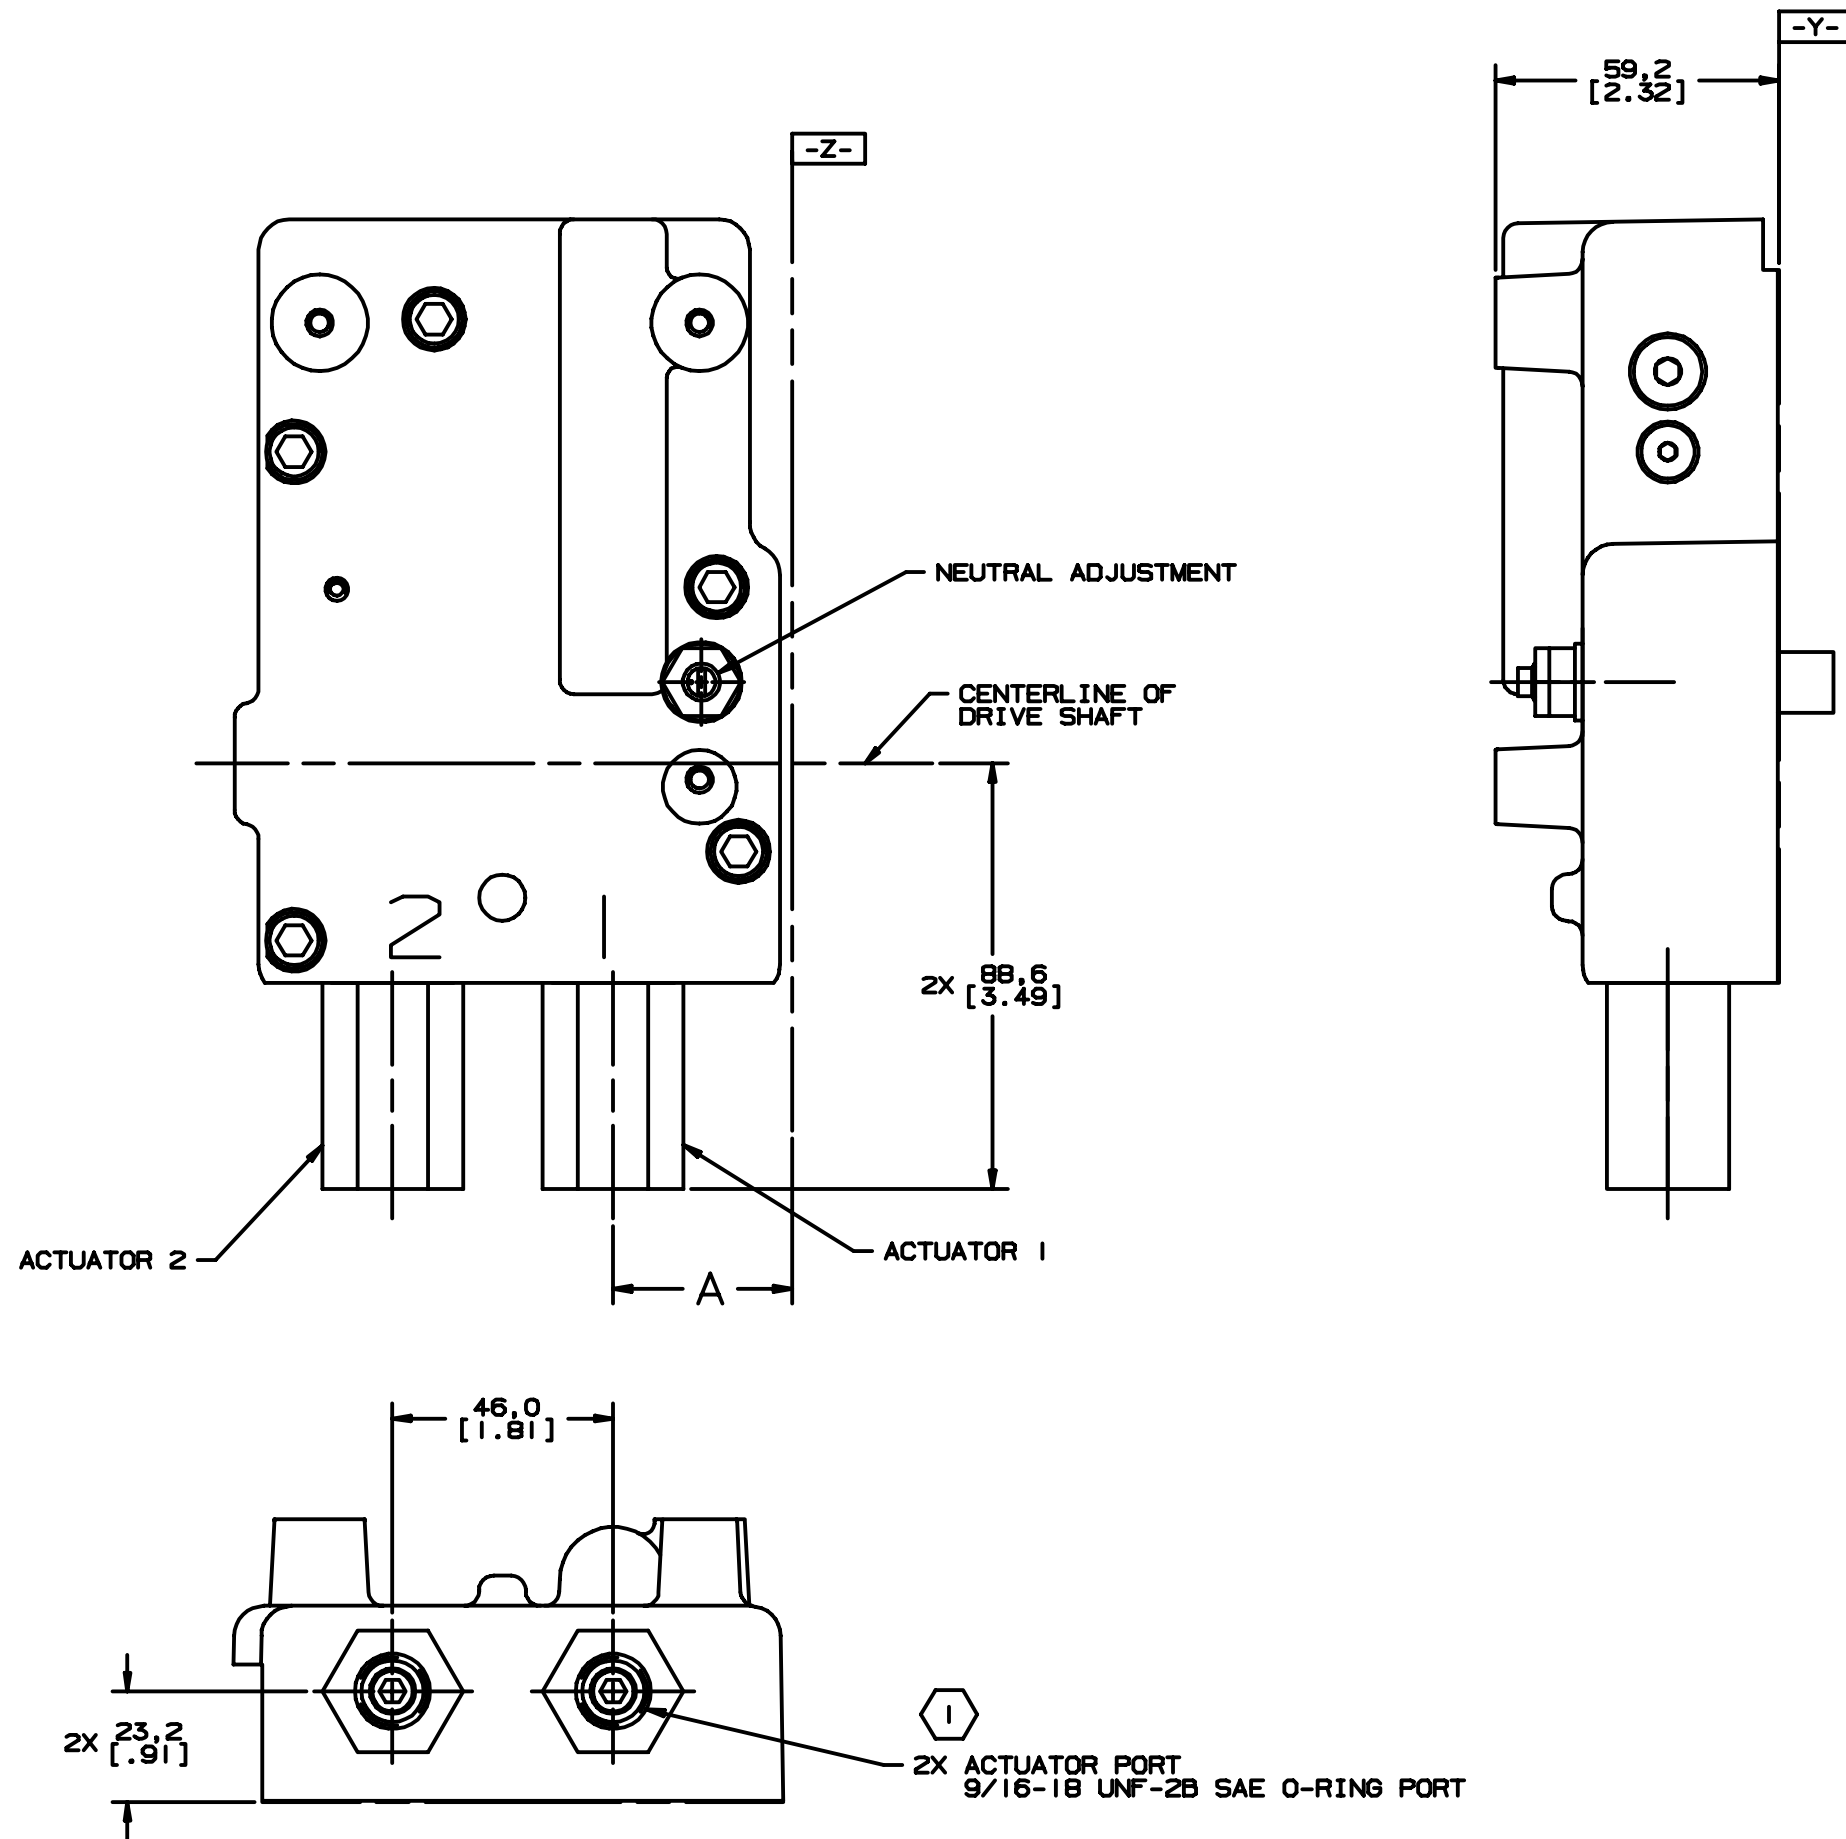

NOTE
 (1) SECURE ACTUATOR TO PREVENT TURNING WHEN INSTALLING FITTINGS OR HOSES

PORT B FLOW	OUT	IN	IN	OUT
PORT A FLOW	IN	OUT	OUT	IN
ACTUATOR ENERGIZED	1	2	1	2
INPUT SHAFT ROTATION	CW		CCW	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DRAWING BASED ON ANSI Y14.5M-1982	
TOLERANCES		NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION	
.X A ---		Eaton Corporation claims proprietary rights in the information disclosed herein. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown herein without the written permission of the Eaton Corporation.	
.XX A ---		DATE AGJ 10-14-98	
.XXX A ---		DATE JED 10-18-98	
< A ---		DATE MSJ 10-22-98	
UNSPECIFIED RADI ARE ---		DATE ---	
UNSPECIFIED DRAFT ANGLES ARE ---		DATE ---	
DRAWING FORMALLY CHECK BY (INITIALS)		THIRD ANGLE PROJECTION	
		DO NOT SCALE	
		SCALE 1/1	
		SHEET 1 OF 1	