SYM	REVISION	BY	DATE	ECN
A	RELEASED FOR SAMPLES AND ESTIMATES	PM	5-30-78	X0574
B	ENGINEERING RELEASE (XET-14007-019)	PM	1-24-79	3007
R	REVISED AND REDRAWN	MB	10-30-85	5884
S	1. 'O' RING PLUG WAS SOCKET HD.-4 PLCS 3F, 5F, 3D, 5D 2. 3.414 MAX. WAS 3.164 1E	SVF	5-22-86	13397
T	INSTALLATION NOTE WAS LIMIT INSTALLATION TORQUE OF MOUNTING BOLTS TO 20 FT. LBS. MAXIMUM OR CLAMPING LOAD OF 3000 LBS. MAXIMUM.	DDS	1-21-87	13934
U	4F ADDED MOUNTING HOLE NOTE	LE	4-26-88	15204

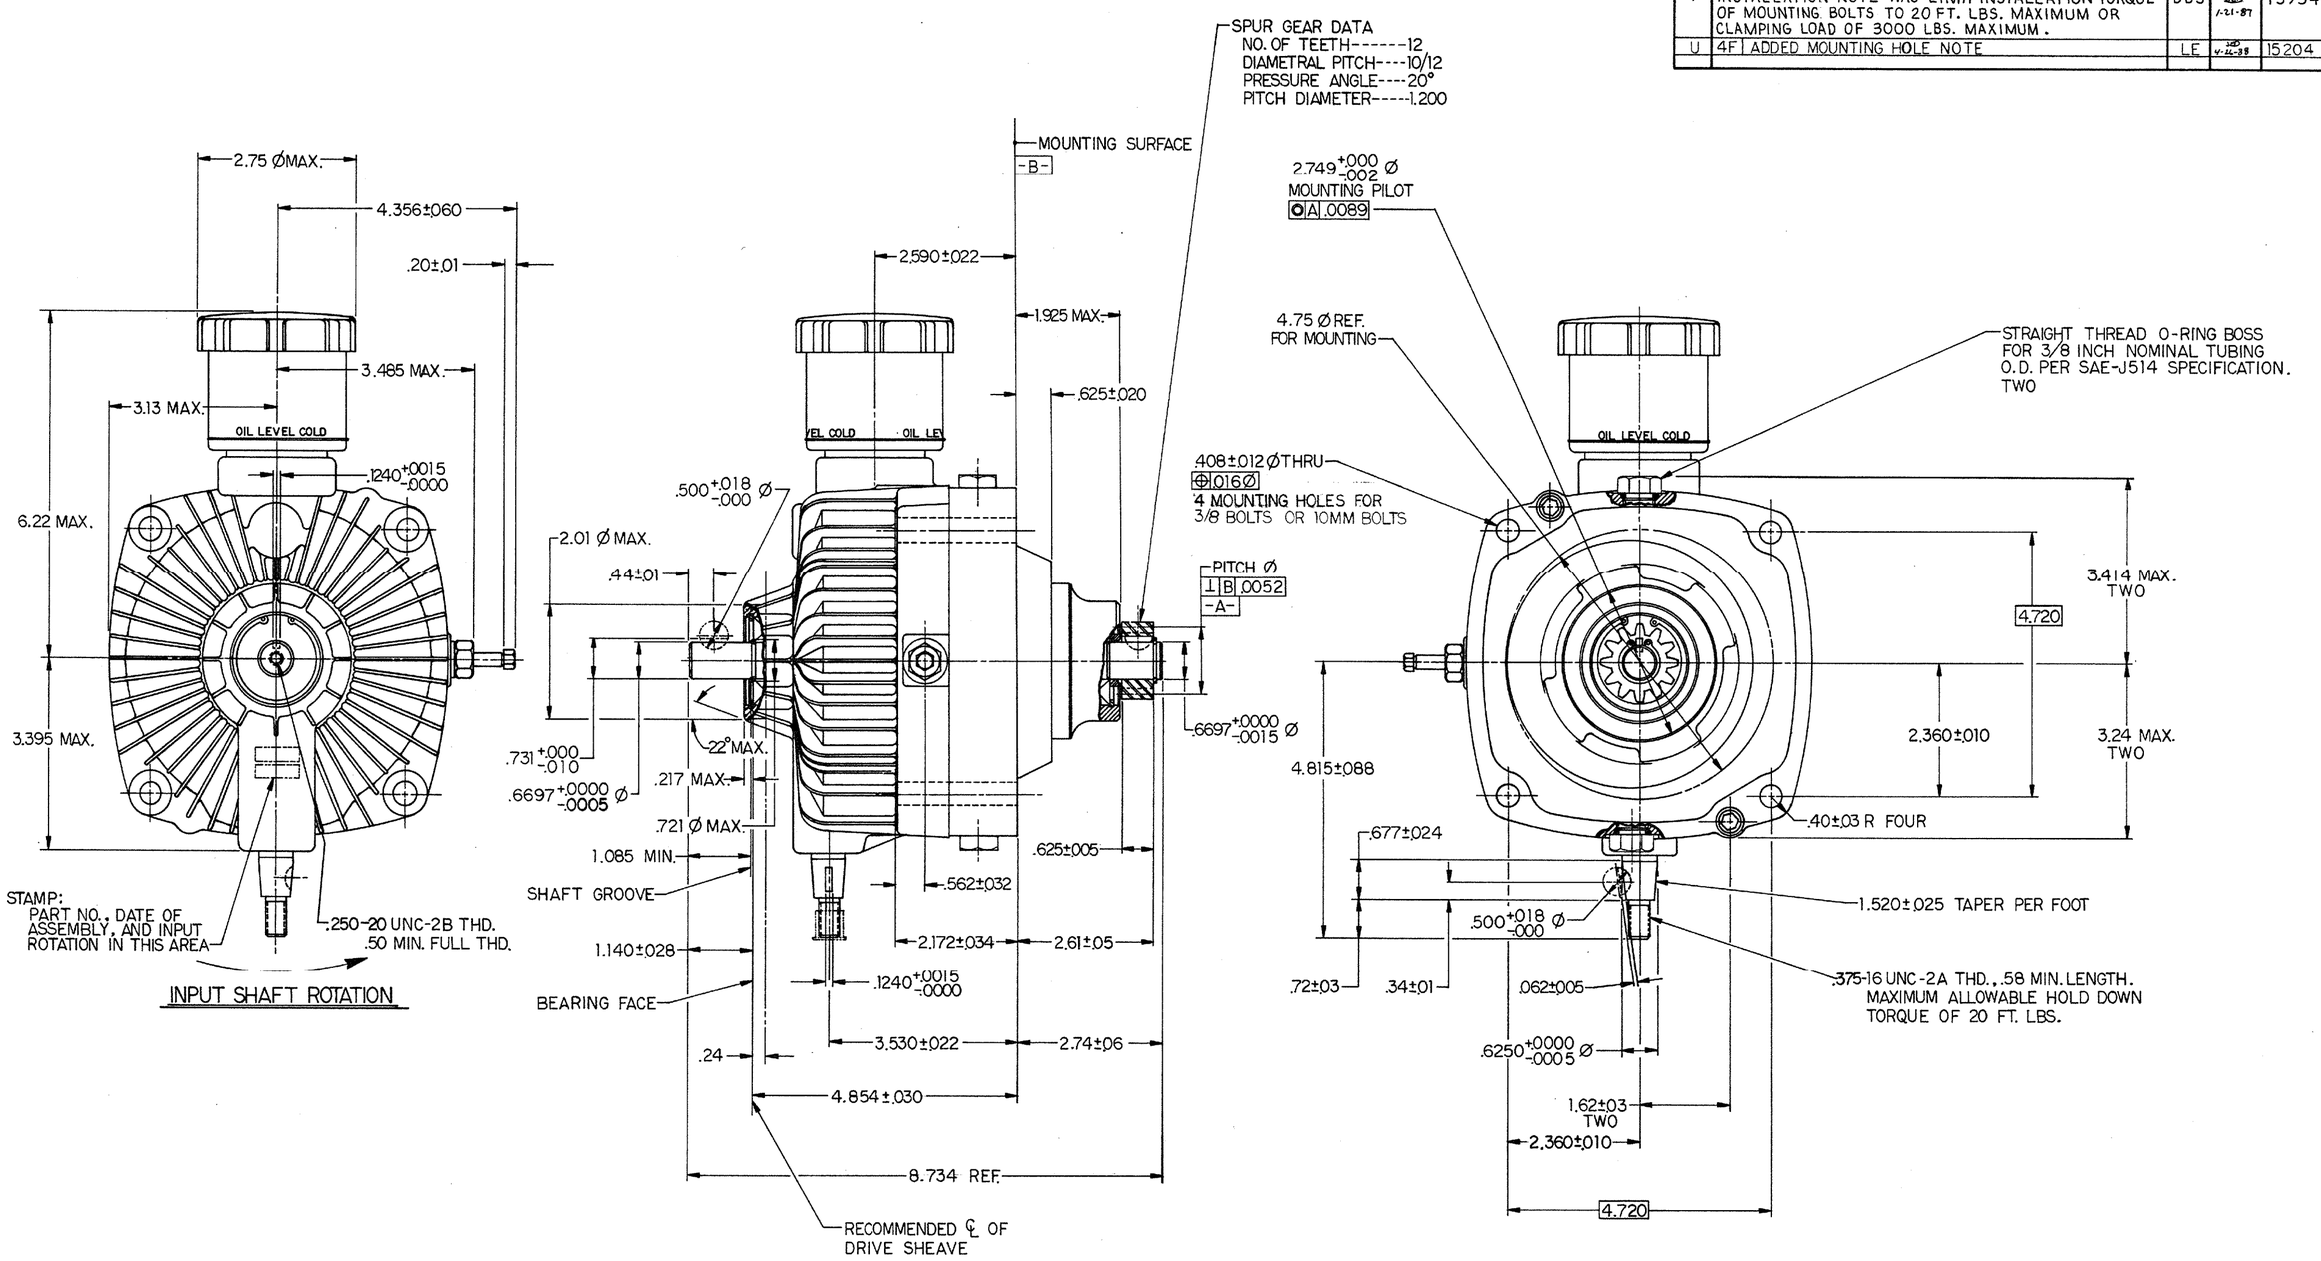

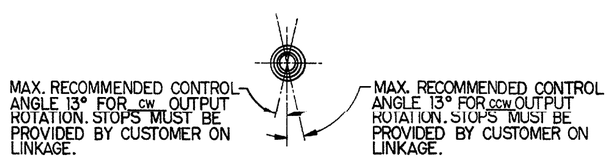

CONTROL SHAFT

UNIT RATINGS
MAXIMUM INPUT SPEED:
NOT TO EXCEED 3600 RPM
MAXIMUM OUTPUT SPEED:
2050 TO 2400 RPM
VOLUME OF OIL REQUIRED TO FILL CASE:
24.0 FLUID OZS. (706 ML)
UNIT DRY WEIGHT:
25 LBS.

OPERATING CONDITIONS
FLUIDS:
REFER TO DATA SHEET EH-2043 FOR RECOMMENDED OIL SPECIFICATION.
CASE PRESSURE:
CASE PRESSURE SHOULD NOT EXCEED 12 PSIG INTERMITTENT, 7 PSIG CONTINUOUS.
TEMPERATURE:
MAXIMUM CONTINUOUS OPERATING TEMPERATURE SHOULD NOT EXCEED 180° F.
INSTALLATION:
INSTALLATION TORQUE OF MOUNTING BOLTS, .375 Ø, TO BE 18-22 FT.-LB./25-30 NM.

NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION
Eaton Corporation claims proprietary rights to the material disclosed hereon. This drawing and/or technical information is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown or referred to hereon without direct written permission from Eaton Corporation to the user. This drawing and/or technical information is the property of Eaton Corporation and is loaned for mutual assistance, to be returned when its purpose has been served.
THIS DRAWING AND/OR TECHNICAL INFORMATION IS THE PROPERTY OF EATON CORP.

EATON
Eaton Corporation
Hydraulics Division
15151 Highway 5
Eden Prairie, MN 55344

DRAWN BY/DATE P.M. 1-9-79
CHECKED BY/DATE D.V.L.
ENGRG BY/DATE
DO NOT SCALE
MATERIAL/HEAT TREAT
CCW INPUT
TITLE
7 HYDROSTATIC TRANSMISSION
THIRD ANGLE PROJECTION
GST
NUMBER 000700-002
SCALE FULL SIZE SHEET 1 OF 1