
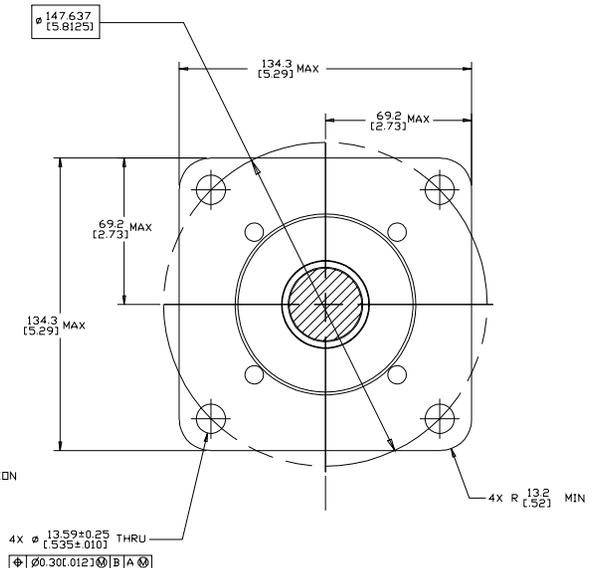
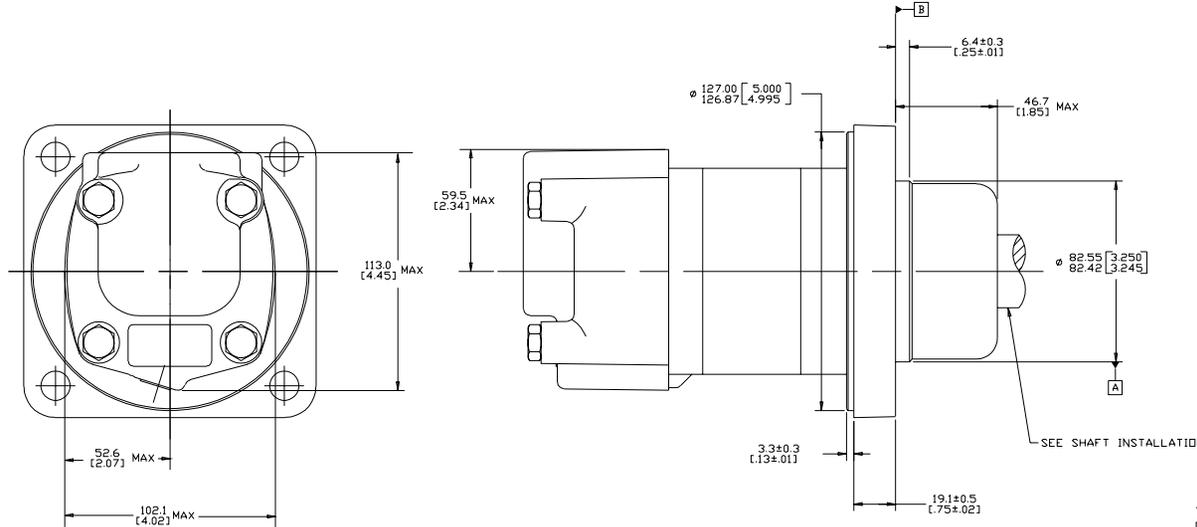


REV	REVISION	BY	DATE	ECN
A	RELEASE FOR SAMPLES AND ESTIMATES	RAF	7/8/93	X6689
B	ENGINEERING RELEASE	RAF	3/7/94	M11375
C	(4)NOTE 2 WAS MOUNTING TYPE: R	AGJ	5/13/08	41044
D	-1)DIMENSIONS REVISED FOR STACKUP -2)DRAWING UPDATED TO ASME Y14.5M-1994 STANDARD	ABH	7/24/13	M89956

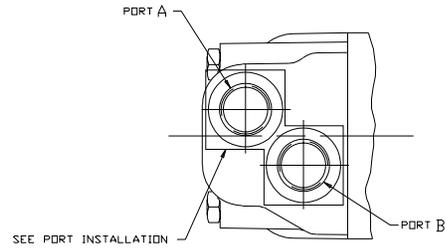

NOTE

- 1 ROTATION:  
 STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;  
 CLOCKWISE WHEN PORT 'A' IS PRESSURIZED  
 COUNTERCLOCKWISE WHEN PORT 'B' IS PRESSURIZED  
 REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;  
 CLOCKWISE WHEN PORT 'B' IS PRESSURIZED  
 COUNTERCLOCKWISE WHEN PORT 'A' IS PRESSURIZED
- 2 MOUNTING TYPE: AR  
 WHEEL, 4" BOLT, Ø 82.6 [3.25] PILOT  
 Ø 13.59 [0.535] HOLES, DN Ø 147.6 [5.81] BOLT CIRCLE  
 Ø 127.0 [5.000] REAR MOUNT PILOT

REVIEWED FOR CLASSIFICATION PER ESP -042

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES	DRAWING BASED ON ASME Y14.5M-1994	
TOLERANCES	DATE: 7/22/93	MATERIAL/HEAT TREAT
XX + REF	DATE: 7/22/93	2000 SERIES MOTOR INSTALL
XX + DNL	DATE: 7/22/93	NUMBER: A-750-001
UNSPECIFIED DIMENSIONS	DATE: 7/22/93	SCALE: 1/1
UNSPECIFIED DIMENSIONS	DATE: 7/22/93	SHEET: 1 OF 1

THIRD ANGLE PROJECTION  
 DO NOT SCALE  
 DIMENSIONAL AVERAGE